



**Sigenergy** focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

[www.sigenergy.com](http://www.sigenergy.com)

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.



# Home Energy Solution

Let the world enjoy green energy



# CONTENTS

01

## Brand Story

About SIGENERGY

02

## Product

Residential Solution

Why Sigenergy?


Product Portfolio

03

## Trusted Partner

Solar-powered Manufacturing

Global Cases

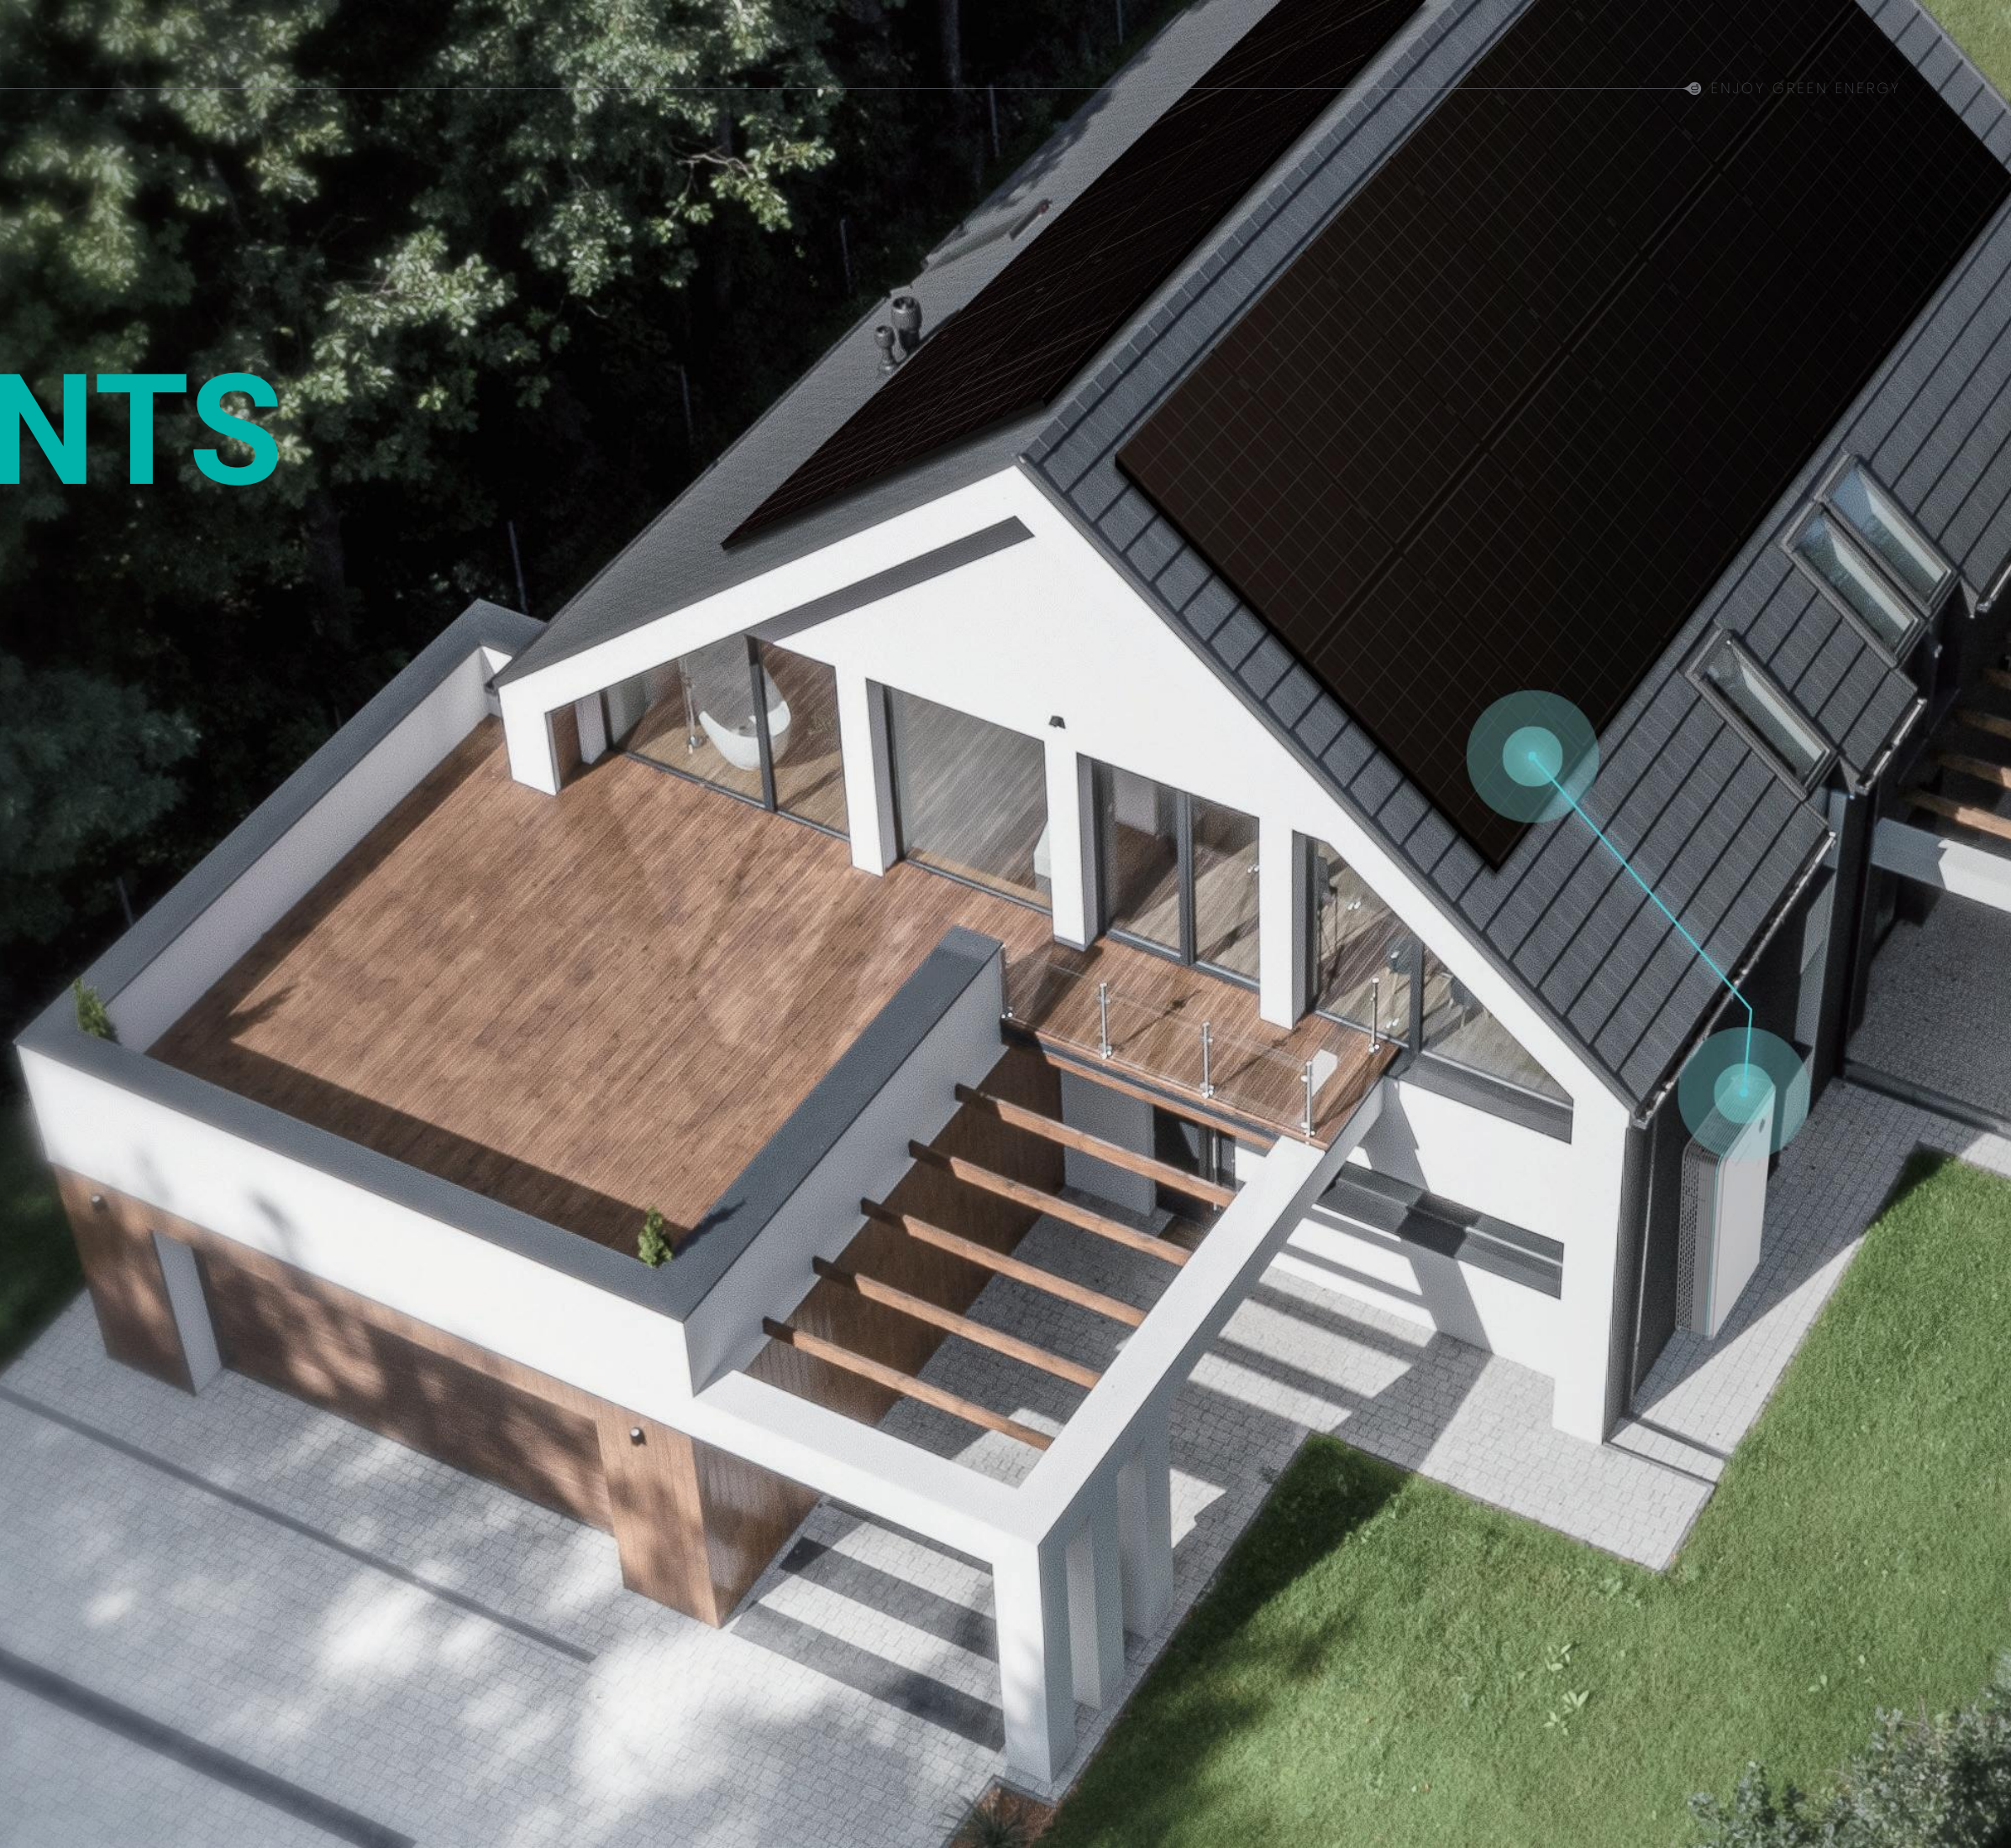



# ABOUT SIGENERGY

**Sigenergy** focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

## VISION

Enjoy Green Energy

## MISSION

Be a distributed energy pioneer.

Build intelligent energy solutions with superior safety, ultra simplicity, and outstanding performance.

# SIGEN

Safe Intelligent Green Efficient New





# Sigenergy Home Energy Solutions



## 5-in-One SigenStor



**SigenStor EC**  
For solar + Energy storage system




**SigenStor EVDC**  
Bi-directional EV charger



**SigenStor BAT**  
Modular BESS

## Sigen LoadHub



**Sigen LoadHub**

## Micro Inverter




**SigenMicro Inverter**  
Ideal for rooftop and balcony solar

## EV AC Charger



**Sigen EVAC Charger**  
Power drives with smart energy

## App & Cloud



**Sigen Cloud**  
A platform for device lifecycle mgmt. and business decision-making



**mySigen App**  
Intelligent energy mgmt. within touches



Why Sigenenergy?

## 01 Visualize Every Ray of Energy


Track energy flow with precision—from power generation to consumption. Gain clear insights into your battery's green energy composition, ensuring transparency and efficiency in every charge.

### System-level

Know every watt's source and destination

### Load-level

See the power source behind every watt

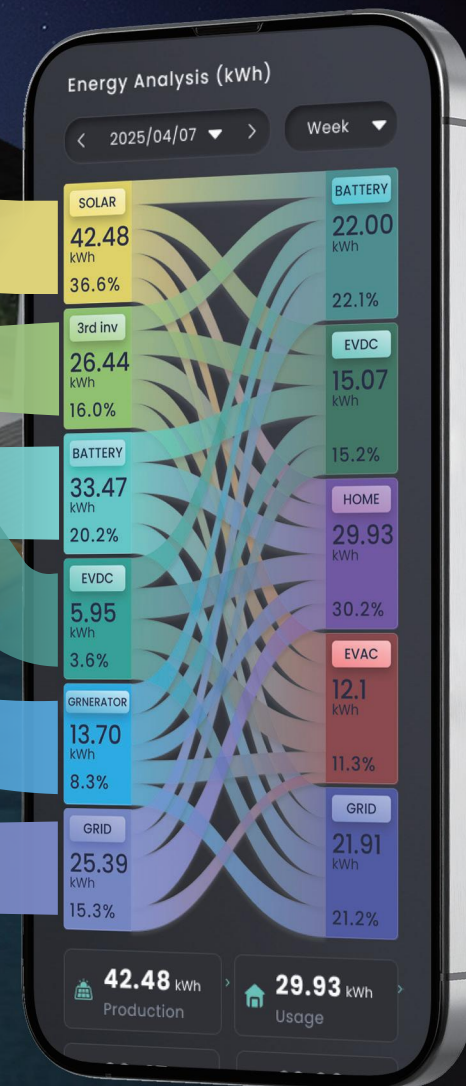


Why Sigenenergy?

## 02 Let AI Power Your Energy Freedom

mySigen App integrates AI deeply with Sigen AI Mode, AI-driven insights, and a GPT-4o - powered smart assistant, using advanced AI to boost system efficiency, convenience, and performance.

Intelligent diagnostics powered by AI deep thinking

AI-empowered system operation strategy analysis

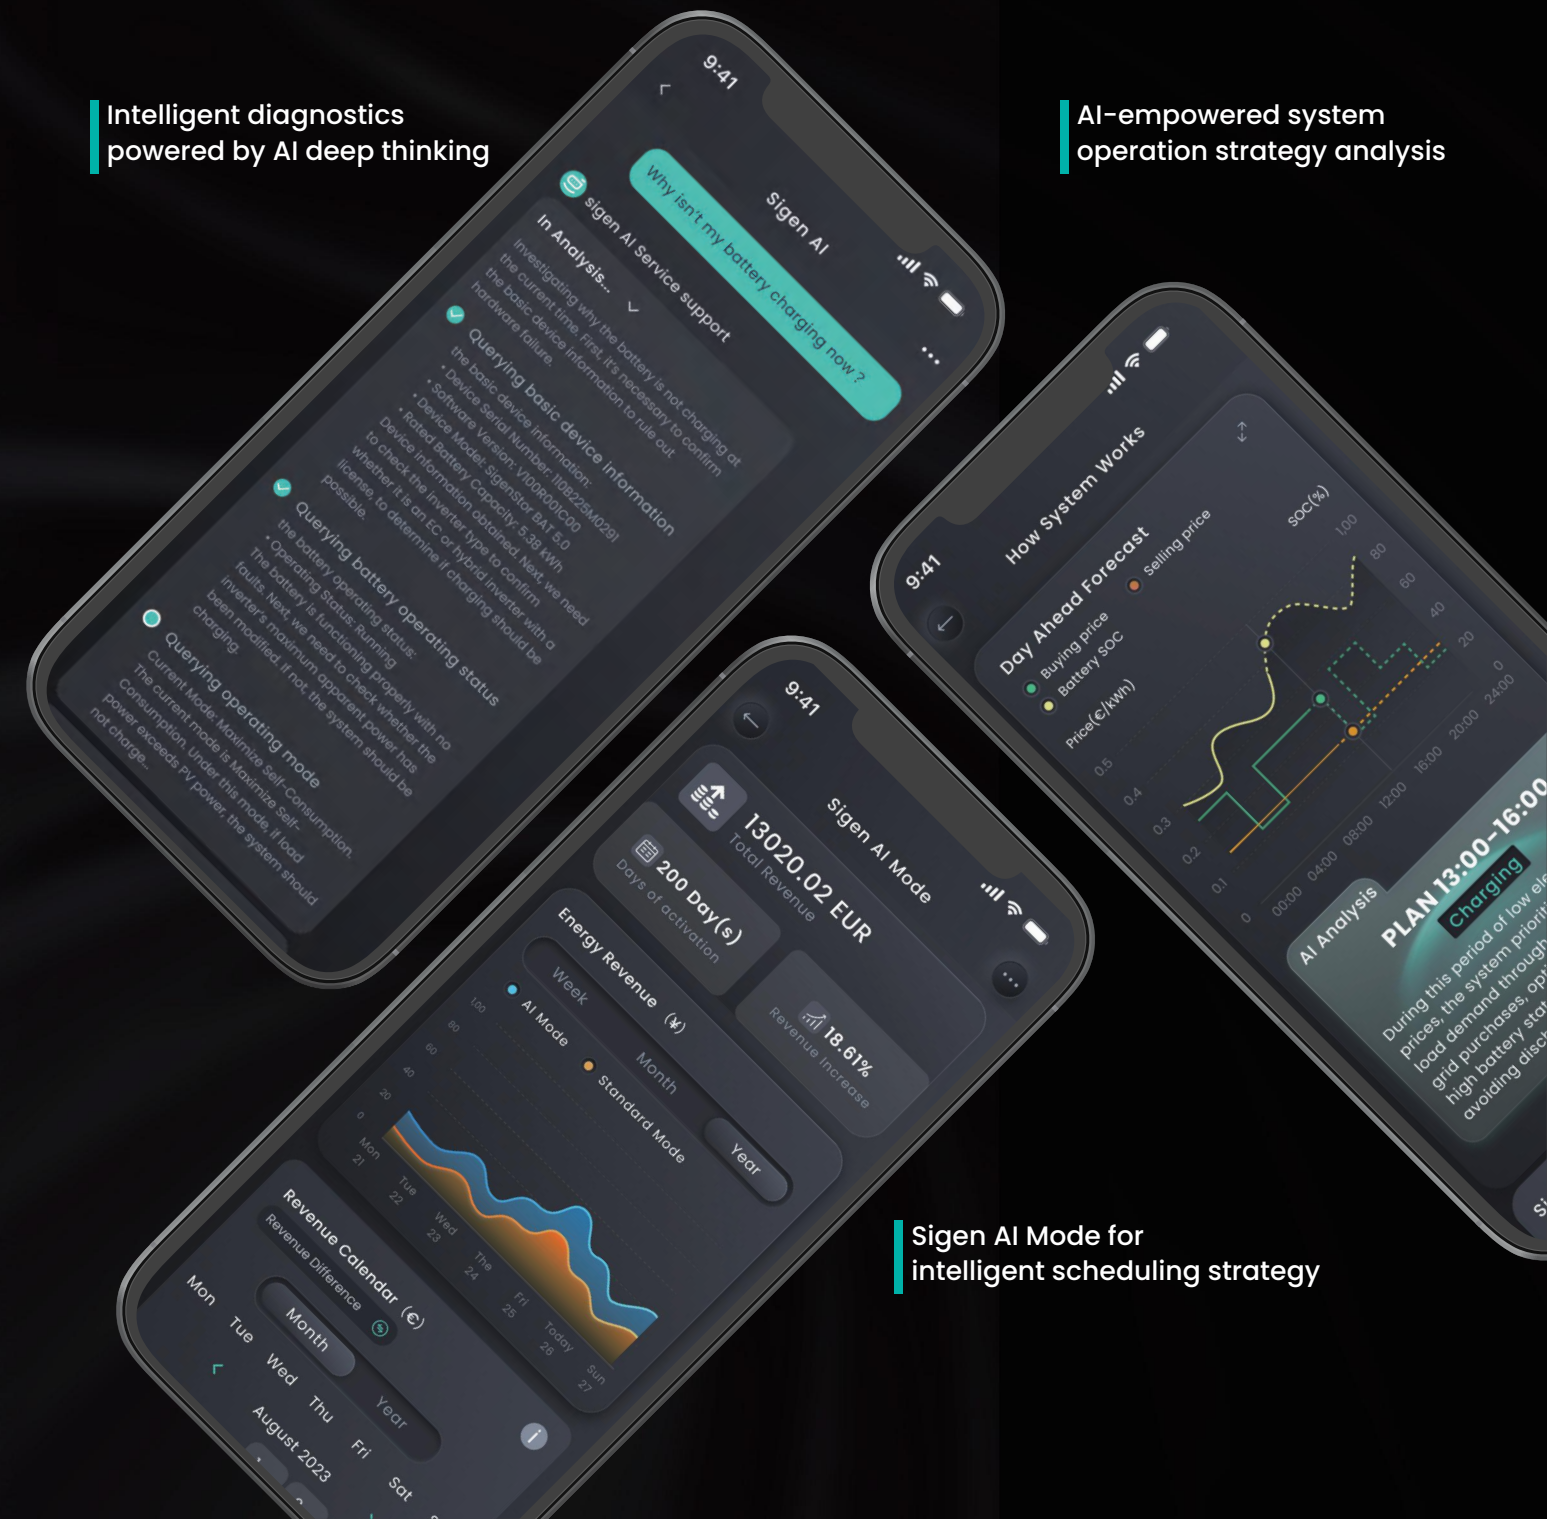

Sigen AI Mode for intelligent scheduling strategy




Why Sigenergy?

## 03 Safety Guard Always Reliable


Sigen Battery uses high-reliable LFP cells and features industry-leading protections. Offering 10,000 life cycles\* and superior safety. Setting a new benchmark for battery safety.

# 5 Layers Battery Safety Protection

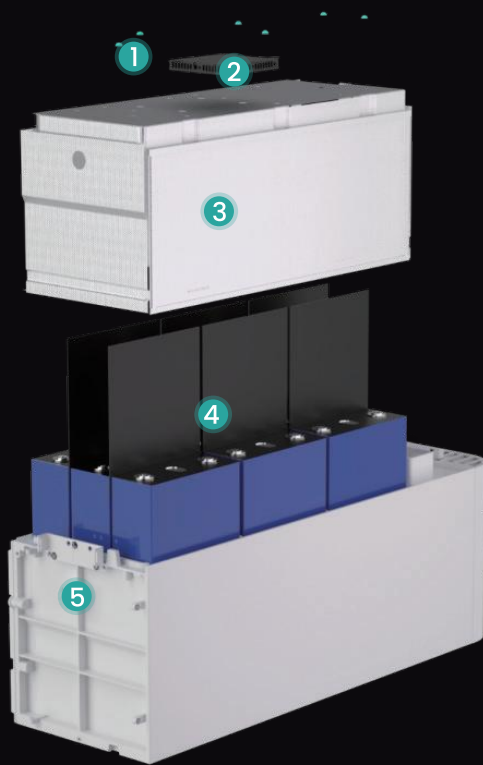

- 1 Cell-level temperature monitoring
- 2 Internal fire extinguishing kit
- 3 High-temp. resistance insulated pads
- 4 Aerogel insulated pads
- 5 Decompression valve

Real-time monitoring of battery status on  
**mySigen APP**

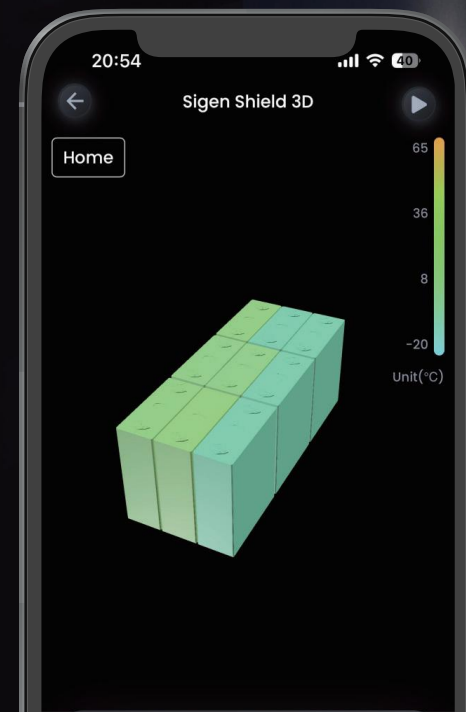

\*This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.

Why Sigenergy?

## 04 Goodbye to Power Outage

Sigenergy provides the ultimate backup solution. Our patented power control algorithm enables seamless switching among multiple energy, with robust off-grid performance for your home.

# 0 ms Load-side disruption





Why Sigenenergy?

## 05 Innovative DC-Coupled Architecture

Direct DC bus connection among PV, ESS and EV chargers boosts system efficiency and power density. With a smart battery optimizer for each pack, it supports mixed use of new/old batteries and active balancing.



**DC BUS**  
Patented architecture

**Optimizer**  
for each battery

**Mixed use**  
of new/old batteries

Why Sigenenergy?

## 06 V2X Pioneering the Future

The world's first V2X-powered home energy revolution. SigenStor EVDC pioneers 25kw bidirectional EV - Home integration, bringing limitless possibilities to the energy industry.



**V2G**  
Peak shaving and  
VPP dispatch


**V2H**  
Backup your home  
with your EV

Scan to discover  
V2X tested EVs



\*V2X functionality is limited by the EVs capabilities. Once the relevant standards are published, V2X feature can be upgraded through the OTA. For the official support of vehicle models and support timelines, please refer to future announcement made on the official website.



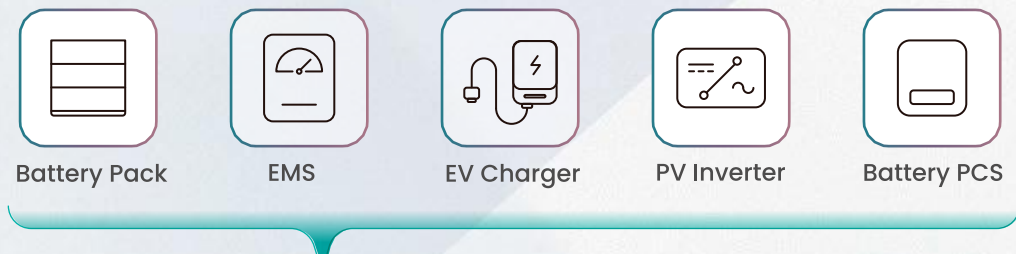

# SigenStor-A-B

**SigenStor EC**  
1 SKU, field configurable to 3.8/4.8/5.7/7.6/9.6 /11.5 kW

**SigenStor EV DC Charger**  
25kW

**SigenStor BAT**  
2 battery pack capacities for 1-6 pack configurations  
6.02kWh | 9.04kWh

6.02kWh Min.      54.24kWh Max.



# ENJOY GREEN ENERGY

SigenStor Part No.	Controller Configuration Model	Battery Pack Configuration Model		Maximum Continuous Output Power (kW)	Total System Energy (kWh)
		SigenStor BAT 6.0 US	SigenStor BAT 9.0 US		
SigenStor-11.5-6.02	SigenStor EC SP US	1	0	11.5	6.02
SigenStor-11.5-9.04	SigenStor EC SP US	0	1	11.5	9.04
SigenStor-11.5-12.04	SigenStor EC SP US	2	0	11.5	12.04
SigenStor-11.5-15.06	SigenStor EC SP US	1	1	11.5	15.06
SigenStor-11.5-18.08	SigenStor EC SP US	0	2	11.5	18.08
SigenStor-11.5-21.08	SigenStor EC SP US	2	1	11.5	21.08
SigenStor-11.5-24.10	SigenStor EC SP US	1	2	11.5	24.10
SigenStor-11.5-27.12	SigenStor EC SP US	3	0	11.5	27.12
SigenStor-11.5-30.12	SigenStor EC SP US	2	2	11.5	30.12
SigenStor-11.5-33.14	SigenStor EC SP US	1	3	11.5	33.14
SigenStor-11.5-36.16	SigenStor EC SP US	0	4	11.5	36.16
SigenStor-11.5-39.16	SigenStor EC SP US	2	3	11.5	39.16
SigenStor-11.5-42.18	SigenStor EC SP US	1	4	11.5	42.18
SigenStor-11.5-45.20	SigenStor EC SP US	0	5	11.5	45.20
SigenStor-11.5-48.20	SigenStor EC SP US	2	4	11.5	48.20
SigenStor-11.5-51.22	SigenStor EC SP US	1	5	11.5	51.22
SigenStor-11.5-54.24	SigenStor EC SP US	0	6	11.5	54.24


Note: The Controller can be configured to 3.8 / 4.8 / 5.7 / 7.6 / 9.6 / 11.5 kW

Sigenergy is leading the new way of producing, storing, dispatching, and consuming electricity in the home. We provide a genuine, all-in-one home energy management system, called SigenStor. Its unique 5-in-One modular design integrates the solar inverter, an optional bi-directional EV DC Charger, the Battery PCS, Battery Packs, and the EMS into one fully integrated, intelligent system. With a new era of battery safety, improved long-term performance, ultra-fast installation and commissioning, and a new dimension of intelligence, SigenStor provides energy security for your home for the long term.



# Sigen Energy Controller

1 SKU, field configurable to  
3.8/4.8/5.7/7.6/9.6 /11.5 kW

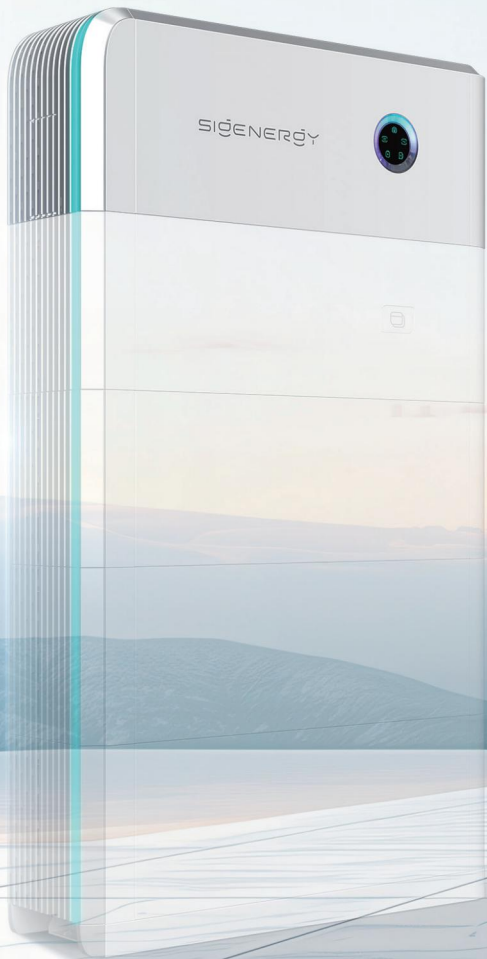

- EMS inside for precise control
- Multi-source black start
- On & off-grid compatibility
- 4 MPPTs with 2:1 DC/AC ratio (oversize PV)
- NEMA 4X system enclosure
- NEC rapid shutdown compliant
- Seamless switching experience
- AFCI function integrated

## Sigen Energy Controller Split Phase US

SigenStor EC SP US							
Field Configuration	3.8	4.8	5.7	7.6	9.6	11.5	Units
DC Input (from PV)							
Max. PV power	7680	9600	11520	15360	19200	23000	W
Max. DC input voltage			600				V
Nominal DC input voltage			360				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			4				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Input / Output (on-grid)							
Nominal output power	3840	4800	5760	7680	9600	11500	W
Max. continuous current	16.0	20.0	24.0	32.0	40.0	48	A
AC switch current rating	20.0	25.0	30.0	40.0	50.0	60.0	A
Nominal output voltage			240 / 120				V
Grid frequency range			59.3 ~ 60.5				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
Efficiency							
Max. efficiency			97.8%				
AC Output (backup)							
Backup output power @240V	3840	4800	5760	7680	9600	11500	W
Backup output power @120V	1920	2400	2880	3840	4800	5750	W
Peak output power (10 seconds)	8640	8640	8640	17100	17100	17100	W
Nominal output voltage			240 / 120				V
Output frequency range			59.3 ~ 60.5				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total voltage harmonic distortion			THDv < 2%				
Disruption time of backup switch <sup>1</sup>			0				ms
Battery Connection							
Supported battery module		SigenStor BAT 6.0 / 9.0 US					
Battery module voltage range		300 ~ 600					V
General Data							
Dimensions (W / H / D)	27.6 x 11.8 x 10.2 / 700 x 300 x 260					in / mm	
Weight	77.1 / 35					lbs / kg	
Storage temperature range	-40 ~ 158 / -40 ~ 70					°F / °C	
Operating temperature range	-22 ~ 140 / -30 ~ 60					°F / °C	
Relative humidity range	0% ~ 95%						
Max. operating altitude	13123 / 4000					ft / m	
Cooling	Smart air cooling						
Communication	WLAN / Fast Ethernet (FE) / RS485 / Sigen CommMod US (4G / 3G)						
Standard Compliance							

Certifications

UL 1741, UL 1741 SB, UL 1741 CRD, IEEE 1547-2018, IEEE1547.1-2020, UL 1998, UL 991, UL 1699B, CP 65, FCC Part 15 Class B

<sup>1</sup>. This refers to the load-side disruption time, to achieve this function Sigen LoadHub needs to be used together with Sigen Energy Controller US and Sigen Battery US. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.



# Sigen EV DC Charging Module

- World's first V2X-integrated all-in-one home energy system
- 25kW bi-directional charging, rapid replenishment for EVs
- 150V-1000V charging voltage, universal EV compatibility
- Support 100% green charging, drive with sun power
- NEMA 4X system enclosure



## Sigen EV DC Charging Module 25 kW US


SigenStor EVDC <sup>1</sup>	25	Units
DC Output		
Max. charging power of charging port	25	kW
Max. discharging power of charging port	25	kW
Output voltage range	150 ~ 1000	V
Max. output current	80	A
Charging connector	CCSI / NACS	
Protection		
Short-circuit protection	Supported	
Over / Under voltage protection	Supported	
Overload protection	Supported	
Over temperature protection	Supported	
Reverse polarity protection	Supported	
Welded contactor check	Supported	
General Data		
Dimensions (W / H / D)	27.56 x 10.63 x 10.24 / 700 x 270 x 260	in / mm
Weight <sup>2</sup>	≤ 89 / ≤ 40	lbs / kg
Storage temperature range	-40 ~ 158 / -40 ~ 70	°F / °C
Operating temperature range	-22 ~ 140 / -30 ~ 60	°F / °C
Relative humidity range	5% ~ 95%	
Max. operating altitude	13123 / 4000	ft / m
Cooling	Smart air cooling	
System enclosure type	NEMA 4X	
Integrated charging cable length <sup>3,4</sup>	16.4 / 5 or 24.6 / 7.5	ft / m
Function		
Authentication	RFID card / APP / No authentication	
Application	Bi-directional charging (V2H / V2G) <sup>5</sup> , Smart load management	
User interfaces	LED indicator, App, RFID	
Remote function	OTA, Remote diagnostics	

1. SigenStor EVDC needs to be used together with Sigen Energy Controller US.  
2. Net weight is less than 40kg, which excludes the charging connector, exteriors and attachments used for wall-mounted installations.  
3. Integrated charging cable length refers to the length of the cable that extends from the SigenStor EVDC, not the length of the exposed cable.  
4. Without provision of Cable Management System(CMS) with our product, the cable length is less than the max. limit 5m in Canada or 7.5m in U.S according to their regulations and standards.  
5. V2X functionality may be limited by EV's capabilities.



# Sigen Battery

- Large cell capacity, low voltage & durable
- Multi-layer full battery safety protection
- Visible battery status on myPointGuard App
- Self-guiding pin connectors for fast installation
- AI-assisted, optimized battery cycle life
- Parallel connections for flexible battery combinations

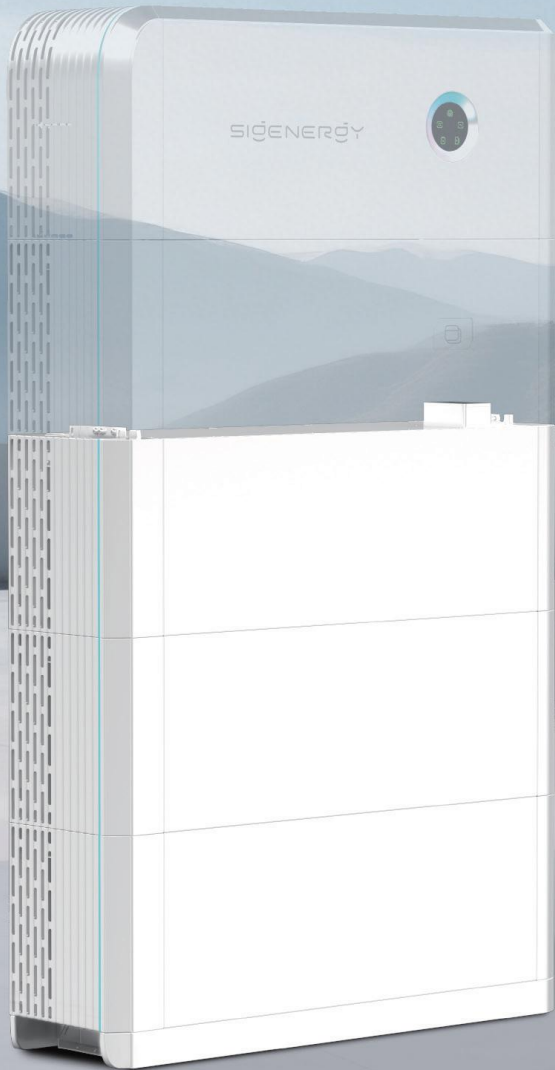

## Sigen Battery 6.0 / 9.0 US

SigenStor BAT	6.0 US	9.0 US	Units
Performance Specification			
Battery type	LiFePO <sub>4</sub>		
Total energy capacity	6.02	9.04	kWh
Usable energy capacity <sup>1</sup>	5.84	8.76	kWh
Max. charge / discharge power	3000	4600	W
Peak charge / discharge power (10 seconds)	4500	6900	W
General Data			
Weight	136.7 / 62	172.0 / 78	lbs / kg
Dimensions (W / H / D)	30.2 x 10.6 x 10.4 / 767 x 270 x 265		in / mm
Storage temperature range	-13 ~ 140 / -25 ~ 60		°F / °C
Operating temperature range	-4 ~ 131 / -20 ~ 55		°F / °C
Relative humidity range	5% ~ 95%		
Max. operating altitude	13123 / 4000		ft / m
Cooling	Natural convection		
System enclosure type	Type 4X		
Installation method	Floor standing / Wall-mounted		
Standard Compliance			

1. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C, at the beginning of life.  
2. This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.  
3. The data in the table is based on the combination of Sigen Battery 9.0 US and Sigen Energy Controller US under Split Phase Low Voltage as an example, with a ground-mounted installation.



# Sigen LoadHub

- 5 double-pole controllable loads
- 0 ms load-side disruption when switching to backup mode
- Supports generator, heat pump or other controllable load
- Supports both whole-home & partial-home backup
- Uninterrupted power supply through PV +ESS/grid/generator



## Sigen LoadHub

Sigen LoadHub		Units
Electrical Specification		
Grid connection type	Split phase	
Nominal AC voltage	120 / 240	V
Nominal AC frequency	60	Hz
Max. short circuit current ( I <sub>sc</sub> )	10	kA
Current measurement accuracy	± 1 %	
Voltage measurement accuracy	± 1 %	
Grid Connection		
Max. continuous current	200	A
Max. overcurrent protection device rating	200	A
Disruption time of backup switchover <sup>1,2</sup>	0	ms
AC Output to Main Distribution Panel		
Max. continuous current	200	A
Max. overcurrent protection device rating	200	A
Overvoltage category	IV	
SigenStor Connection		
Max. number of connection	2	
Max. continuous current	48	A
Max. overcurrent protection device rating	60	A
Max. AC nominal power per inverter connection	11.5	kW
Smart Load Port Connection		
Max. number of connection	5	
Max. continuous current	64	A
Max. overcurrent protection device rating	80	A
Generator Port Connection		
Max. continuous current	64	A
Max. overcurrent protection device rating	80	A
Dry contact switch voltage rating	30	V
Dry contact switch current rating	1	A
Generator 2-wire start	Supported	
General Data		
Dimensions (W / H / D)	21 x 32 x 7 / 532 x 814 x 180	in / mm
Weight	60 / 27	lbs / kg
Storage temperature range	-40 ~ 158 / -40 ~ 70	°F / °C
Operating temperature range	-22 ~ 131 / -30 ~ 55	°F / °C
Relative humidity range	0% ~ 95%	
Max. operating altitude	13123 / 4000	ft / m
Cooling	Natural convection	
Enclosure type	Type 3R	
Communication	Fast Ethernet (FE), RS485, dry contact	
Installation method	Wall-mounted	
Standard Compliance		
Certifications	FCC Part 15 Subpart B, ICES-003, ANSI C63.4a:2017, UL 67, UL 869A UL 1741, UL 1741 PCS CRD, CSA C22.2 No.107.1-16, CA Proposition 65	

1. This refers to the load-side disruption time, to achieve this function Sigen LoadHub needs to be used together with Sigen Energy Controller US and Sigen Battery US. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller US is higher than the total power of the home loads.  
2. The MID Switch complies with UL Category NRNT2 and fulfills with the standards of UL 508, UL 60947-1, UL 60947-4-1, UL 61810-1 as well as UL 61810-20.




# SigenMicro Inverter

384 W / 480 W 1-in-1 | 768 W / 960 W 2-in-1

- Innovative DAB Topology, highest efficiency in the industry\*
- The world's first WiFi Mesh, more reliable and scalable
- The world's first EMS inside, free from network gateway
- AI layout recognition, 5 minutes fast commissioning
- Whitelisting security, enhanced data protection

\*At 960 W level.

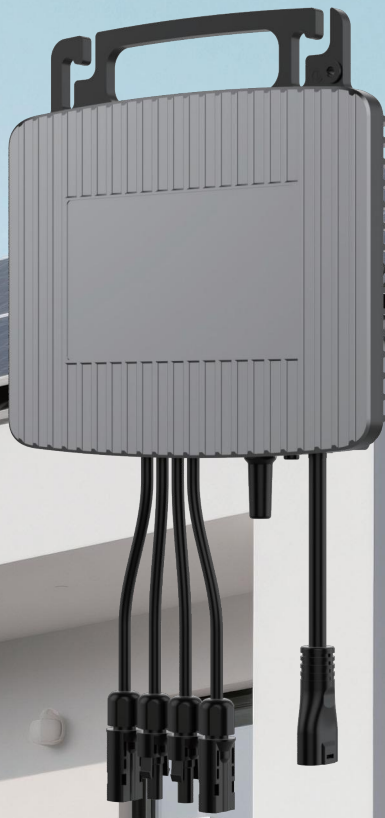

## SigenMicro Inverter

SigenMicro	384 US	480 US	768 US	960 US	Units
DC Input (from PV)					
Commonly used module power	320 ~ 540+	400 ~ 670+	(320 ~ 540+) x 2	(400 ~ 670+) x 2	W
Start-up voltage	20				V
Min. PV input voltage / Start-up voltage	16 / 20				V
MPPT voltage range	16 ~ 60				V
Number of modules connected	1	1	2	2	
Max. input current	16 x 1	16 x 1	16 x 2	16 x 2	A
Max. input short-circuit current	25 x 1	25 x 1	25 x 2	25 x 2	A
AC Output (on-grid)					
Max. continuous output power	384	480	768	960	VA
Max. continuous output current	1.6	2	3.2	4	A
Nominal (L-L) output voltage	240				V
Nominal (L-L) output voltage range <sup>1</sup>	211 ~ 264				V
Nominal grid frequency	60				Hz
Grid frequency range <sup>1</sup>	57 ~ 63				Hz
Total current harmonic distortion	THDi < 3% (at rated power)				
Power factor	0.8 leading ~ 0.8 lagging				
Max. units per 20 A (L-L) branch circuit <sup>2</sup>	10	8	5	4	
Max. units per 30 A (L-L) branch circuit <sup>2</sup>	15	12	7	6	
Max. units per 40 A (L-L) branch circuit <sup>2</sup>	20	16	10	8	
Efficiency					
Max. efficiency	97.5%				
CEC efficiency	97.0%				
Monitoring & Protection					
Grid monitoring	Supported				
Ground fault protection	Supported				
PV module-level monitoring	Supported				
Rapid shutdown	Supported				
Surge protection	Supported				
General Data					
Dimensions (W / H / D)	9.13 x 7.32 x 1.38 / 232 x 186 x 35 (without bracket)				in / mm
Weight	5.5 / 2.5	5.5 / 2.5	6.2 / 2.8	6.2 / 2.8	lbs / kg
Storage temperature range	-40 ~ 185 / -40 ~ 85				°F / °C
Operating temperature range	-40 ~ 149 / -40 ~ 65				°F / °C
Relative humidity range	0% ~ 100%				
Max. operation altitude	13123 / 4000				ft / m
Cooling	Natural convection				
Topology	High Frequency Transformers, Galvanically Isolated				
Night power consumption	< 50				mW
Ingress protection rating	NEMA Type 6 / Outdoor				
Display	LED				
Communication	WLAN				
AC connection type	Plug and play connector				
Installation method	Bracket mounted				

1. Nominal output voltage range and grid frequency range can vary depending on local requirements.  
2. Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.



# Sigen EVAC Charger

- Green power charging with SigenStor
- Data tracking & scheduled charging on mySigen App
- Dynamic load management to prevent overload, user-friendly charging\*
- Easy installation with less steps and top/bottom entry option
- NEMA 4X & IK10 provide high degree of protection
- Compatible with NEMA plug-in installation
- Wall - mounted installation provides high flexibility
- PV surplus charging or fast charging mode achieves high proportion green power usage.
- Scheduled charging provides switching charging power from the grid or solar surplus power according to the local electricity price.

\*Only works with SigenStor EC solution, additional Sigen Power Sensor or Sigen Meter Collar.



\*This function needs to be used with Sigen Power Sensor.

## Sigen EV AC Charger 11.5 kW US

Sigen EVAC	11.5	Units
AC Input & Output		
Nominal charging power	11.5	kW
Nominal output voltage	208 ~ 240	V
Output current range	6 ~ 48	A
Nominal AC frequency	60	Hz
Charging connector	SAE J1772 / NACS SAE J3400	
AC input connection	Hard-wired	
Protection		
Integrated RCD protection	CCID 20	
Flamemability of enclosure	UL 94-5VB	
Mechanical enclosure protection	IK 10	
Automatic recovery	Supported	
Over / Under voltage protection	Supported	
Overload protection	Supported	
Over temperature protection	Supported	
Ground fault protection	Supported	
Surge protection	Supported	
Grounding system	TT, TN	
User Interface & Communication		
Protocol	RS-485, Modbus RTU	
Communication	WLAN / Ethernet	
Authentication	App / Auto-charge (no authentication)	
Display	LED indicator / App	
Charging mode	Standard charging / Scheduled charging	
Metering	External meter with RS485	
Dynamic load management	Supported	
General Data		
Dimensions (W / H / D)	9.21 x 15.12 x 5.35 / 234 x 384 x 136	in / mm
Weight	16.3 / 7.4	lbs / kg
Storage temperature range	-40 ~ 158 / -40 ~ 70	°F / °C
Operating temperature range	-22 ~ 122 / -30 ~ 50	°F / °C
Relative humidity range	5% ~ 95%	
Max. operating altitude	13123 / 4000	ft / m
Cooling	Natural convection	
Enclosure type	NEMA 4X	
Installation method	Wall-mounted	
Application environment	Outdoor / Indoor	
Standby self-consumption	< 3.6	W
Integrated charging cable length	25 / 7.5	ft / m



# mySigen App

Intelligent energy management within touches

Smarter energy life empowered by mySigen App




## Real-time Monitoring

Monitor real-time energy flow on home screen




## Sigen AI Mode

Smart scheduling that adapts to weather, tariffs, and your energy habits for maximum savings

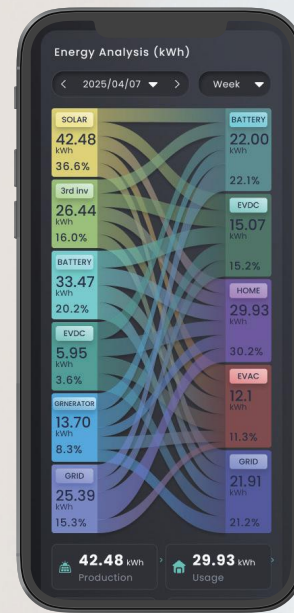


## Energy Sankey Diagram

Know where every watt comes from and where it goes

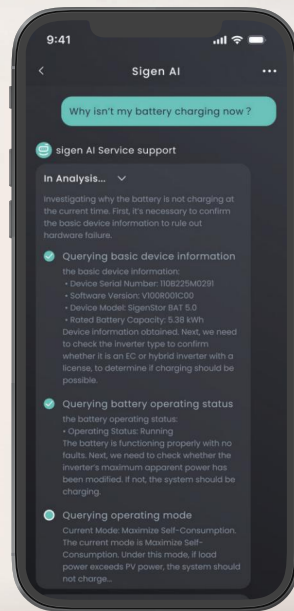

## Sigen AI Assistant

Intelligent diagnostics powered by AI deep thinking

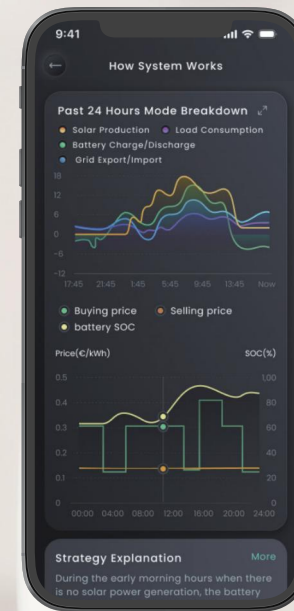

## Strategy Insight

AI-empowered system operation strategy analysis



## Battery Energy Source

Real-time battery power source composition refreshing every 10 seconds





# Sigen Cloud

A platform for device lifecycle management and business decision-making.



- Instantly grasp business trends with data visualization and interactive data modules
- Batch remote system parameter configuration and automatic command retry
- Enhanced system operation status monitoring with multi-layer real-time cell-level information
- Real-time system data updates every 10 seconds, offering clear energy insights at a glance
- Sigen AI smart energy assistant, always online to resolve your inquiries instantly



## Business Operation

Interactive BI Dashboard

Installer Points Dashboard

Points Redemption Mall



## Efficient Maintenance

Alarm Management

System Ownership Management

Group Systems to Manage



## System Monitoring

System Status-based Management

10-second Interval System Energy Flow

System Energy Graphs

System Report Search and Download

Sigen Device and Third-party Device Management

Device Management in Category



## Device Monitoring

10-second Interval Device Real-Time Information

Parameter Check and Remote Configuration

Device Historical Curves



## After-sales Service

Device Warranty Period Lookup

In-organization Member Management



## Organization Management

Company Information

Installer Company Hierarchical Management



## Value-Added Services

AI Smart Assistant

Third-party VPP Integration

Open Northbound Integration



# Runs on Solar by Sigenergy Solutions for a Sustainable Tomorrow

By adopting Sigenergy products and embracing solar energy, our factory has realized green manufacturing. With a 3,000 sqm PV plant on the rooftop, We have significantly reduced our reliance on fossil fuels and effectively cut carbon footprint during the manufacturing process. Our solar-powered production also translates into better efficiency and higher cost savings for our business. We are proud to be making a positive impact on the environment, and are committed to continuing to lead our sustainability practices to help build a better world for future generations.

## Plant Size

🏠 3,000 m<sup>2</sup> ⚡ 362 kW<sub>p</sub>  
🔌 240 kW<sub>ac</sub> 📡 432 kWh

## Estimated Annual Generation

📡 398,200 kWh

## Community Contribution per Year

☁️ 309t CO<sub>2</sub> emission reduced  
🌳 269 equivalent of trees planted





# Powering Homes Worldwide

